




QNN182-HG-54


# 410-430W

Full Black N-Type TOPCon Bifacial Half-Cell Module

## Max Efficiency 22.02%

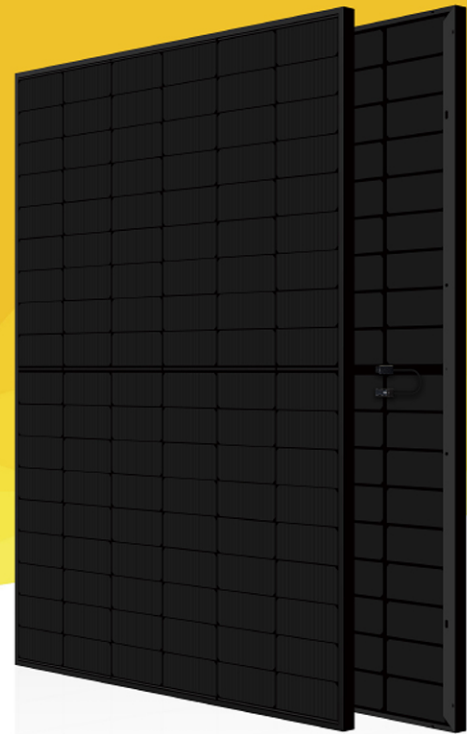

### LINEAR PERFORMANCE WARRANTY

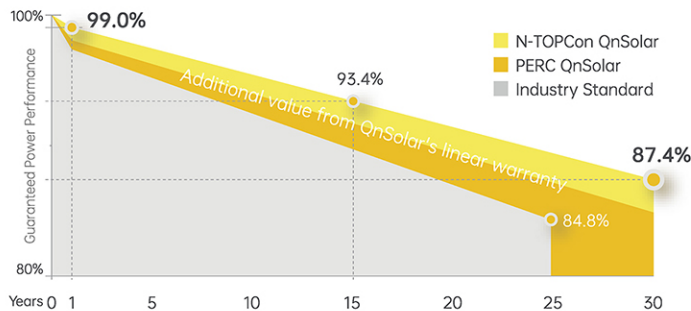

Linear power guarantee over 87.4% power output after 30 years

**15** years

Product materials and process warranty

**30** years

Linear power warranty

**< 1%**

First year power degradation

**< 0.4%**

Year 2-30 power degradation

### COMPREHENSIVE CERTIFICATES



• IEC 61215, IEC 61730 • UNI9177 • ISO 9001:2015 • ISO 14001:2015 • ISO 45001:2018

\* Different markets have different certification requirements. Also, the products are under rapid innovation. Please confirm the certification status with regional sales representatives.



Ultrahigh bifaciality, 25% maximum rear side power gain.



Excellent lower temperature coefficient, 1%-2% more power generation than P-type modules in high temperature areas.



Lower LCOE, 3.5% more power generation than PERC modules, greatly reduce the cost of power generation.



0~+5W positive power tolerance peak power output ensures the reliability of the module.




The module shows excellent weak light performance in the morning, evening and cloudy days.




Improved cell technology and selected materials make the module have good PID resistance.

### PERFORMANCE INSURANCE



Guardians of human health and the natural environment.

Qn-SOLAR PV LIMITED

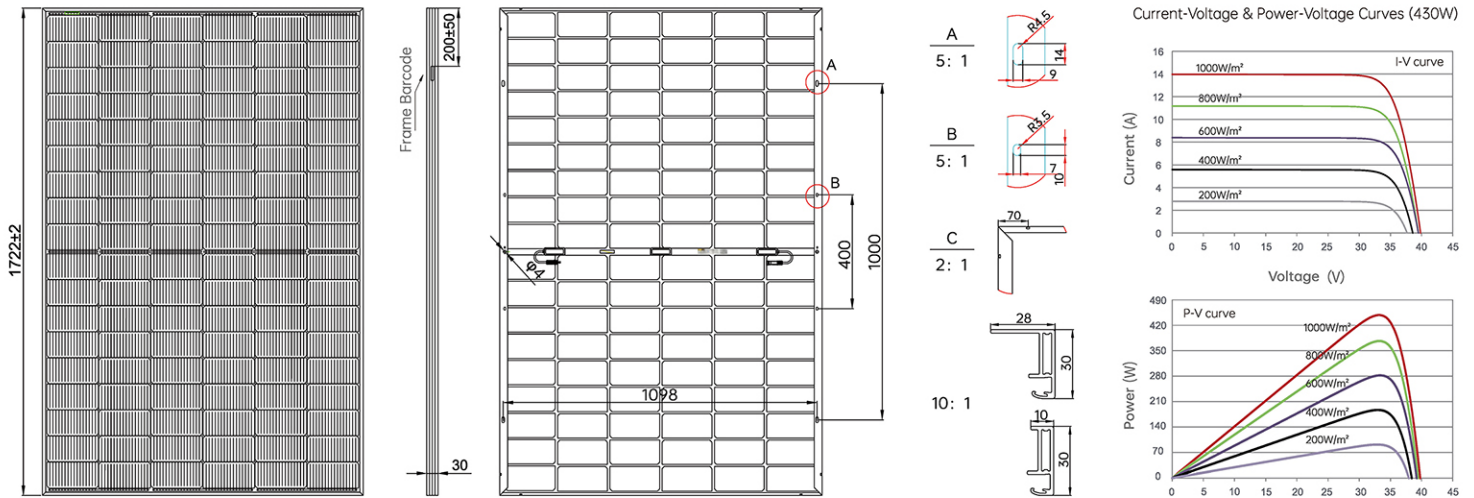

**ELECTRIC CHARACTERISTICS (STC)**

Module Type	QNN182-HG410-54	QNN182-HG415-54	QNN182-HG420-54	QNN182-HG425-54	QNN182-HG430-54
STC Peak Power - Pmax(Wp)	410	415	420	425	430
Optimum Working Voltage - Vmp(V)	31.13	31.32	31.51	31.70	31.88
Optimum Working Current - Imp(A)	13.17	13.25	13.33	13.41	13.49
Open Circuit Voltage - Voc(V)	37.73	37.92	38.11	38.30	38.49
Short Circuit Current - Isc(A)	13.91	13.99	14.07	14.15	14.23
Module Efficiency (%)	21.00	21.25	21.51	21.76	22.02

STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25 °C , Spectra at AM1.5.

**ELECTRICAL CHARACTERISTICS WITH 10% REAR SIDE POWER GAIN**

Total Equivalent power - Pmax (Wp)	451	456	462	468	473
Maximum Power Voltage - Vmp(V)	31.13	31.32	31.51	31.70	31.88
Maximum Power Current - Imp(A)	14.49	14.58	14.66	14.75	14.84
Open Circuit Voltage - Voc(V)	37.73	37.92	38.11	38.30	38.49
Short Circuit Current - Isc(A)	15.30	15.39	15.48	15.57	15.65

Rear side power gain: The additional gain from the rear side compared to the power of the front side at the standardtest condition. It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.

**MECHANICAL PARAMETERS**

Cell Type	N-Type Monocrystalline 182×91mm 16BB
Number of Half Cells	108 (2x54)
Module Size	1722mm × 1134mm × 30mm (35mm)
Weight	24kg (30mm Frame) / 24.2kg (35mm Frame)
Glass	Dual, 2.0mm Coated tempered glass
Frame	Anodized aluminum alloy
Junction Box	IP68 standard (3 bypass diode)
Output Cable	TUV (2pfg1169:2007) 4mm² / 1200mm
Connector	MC4 or (Compatible with MC4)
Hailstone Test	25mm Hailstone at the speed of 23m/s
Mechanical Load	Max. Snow load 5400 Pa, Max. Wind load 2400 Pa

NOCT : Irradiance 800W/m2, Ambient Temperature 20°C , Spectra at AM1.5, Wind at 1m/s.

**TEMPERATURE CHARACTERISTICS**

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of Pmax	-0.29%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.045%/°C
Power Tolerance (W)	0~+5
Maximum Series Fuse Rating	25A
Maximum System Voltage	DC1500V
Operating Module Temperature	-40°C ~ +85°C

**PACKING CONFIGURATION (40'HC)**

936 pcs / container , 26 pallets , 36 pcs / pallet	(30mm Frame)
806 pcs / container , 26 pallets , 31 pcs / pallet	(35mm Frame)